

CloudEngine S5735-S Series Switches

Huawei CloudEngine S5735-S series are standard gigabit Ethernet switches that provide all GE downlink ports and 10GE uplink ports.





Introduction



CloudEngine S5735-S series switches are developed based on next-generation high-performing hardware and the Huawei Versatile Routing Platform (VRP). CloudEngine S5735-S switches support simplified operations and maintenance (O&M), and flexible Ethernet networking. It also provides enhanced Layer 3 features and mature IPv6 features. CloudEngine S5735-S switches can be used in various scenarios. For example, it can be used as an access or aggregation switch on a campus network or as an access switch for Metropolitan Area Network.

Product Overview

Models and Appearances

Models and appearances of the CloudEngine S5735-S series



Models and Appearances	Description
 CloudEngine S5735-S24T4X	<ul style="list-style-type: none"> • 24 x 10/100/1000Base-T ports, 4 x 10 GE SFP+ ports • 1+1 power supply backup • Forwarding performance: 96 Mpps • Switching capacity: 128 Gbps/336 Gbps
 CloudEngine S5735-S24P4X	<ul style="list-style-type: none"> • 24 x 10/100/1000Base-T ports, 4 x 10 GE SFP+ ports • 1+1 power supply backup • PoE+ • Forwarding performance: 96 Mpps • Switching capacity: 128 Gbps/336 Gbps
 CloudEngine S5735-S48T4X	<ul style="list-style-type: none"> • 48 x 10/100/1000Base-T ports, 4 x 10 GE SFP+ ports • 1+1 power supply backup • Forwarding performance: 132 Mpps • Switching capacity: 176 Gbps/432 Gbps
 CloudEngine S5735-S48P4X	<ul style="list-style-type: none"> • 48 x 10/100/1000Base-T ports, 4 x 10 GE SFP+ ports • 1+1 power supply backup • PoE+ • Forwarding performance: 132 Mpps

Models and Appearances	Description
	<ul style="list-style-type: none"> Switching capacity: 176 Gbps/432 Gbps
CloudEngine S5735-S32ST4X	<ul style="list-style-type: none"> 24 x GE SFP ports, 8 x 10/100/1000Base-T ports, 4 x 10 GE SFP+ ports 1+1 power supply backup Forwarding performance: 108 Mpps Switching capacity: 144 Gbps/432 Gbps
	<ul style="list-style-type: none"> 48 x GE SFP ports, 4 x 10 GE SFP+ ports 1+1 power supply backup Forwarding performance: 132 Mpps Switching capacity: 176 Gbps/432 Gbps
CloudEngine S5735-S48S4X	

Note: The value before the slash (/) refers to the device's switching capability, while the value after the slash (/) means the system's switching capability.

Power Supply

Technical specifications of the power supplies applicable to the CloudEngine S5735-S series

Power Module	Technical Specifications	Applied Switch Model
	<ul style="list-style-type: none"> Dimensions (H x W x D): 40 mm x 90 mm x 215 mm (1.6 in. x 3.5 in. x 8.5 in.) Weight: 1.1 kg (2.43 lb) Rated input voltage range: <ul style="list-style-type: none"> 100 V AC to 130 V AC, 50/60 Hz 200 V AC to 240 V AC, 50/60 Hz 240 V DC Maximum input voltage range: <ul style="list-style-type: none"> 90 V AC to 290 V AC, 45 Hz to 65 Hz 190 V DC to 290 V DC Input current: <ul style="list-style-type: none"> 100 V AC to 130 V AC: 12 A 200 V AC to 240 V AC: 8 A 240 V DC: 8 A Maximum output current: <ul style="list-style-type: none"> 100 V AC to 130 V AC input: 16.08 A 200 V AC to 240 V AC input and 240 V DC input: 17.86 A Maximum output power: <ul style="list-style-type: none"> Total power: 900 W (100 V AC to 130 V AC input)/1000 W (200 V AC to 240 V AC input and 240 V DC input) Hot swap: Supported 	<ul style="list-style-type: none"> CloudEngine S5735-S24P4X CloudEngine S5735-S48P4X
	<ul style="list-style-type: none"> Dimensions (H x W x D): 40 mm x 90 mm x 215 mm (1.6 in. x 3.5 in. x 8.5 in.) Weight: 0.8 kg (1.76 lb) Rated input voltage range: 100 V AC to 240 V AC, 50/60 Hz Maximum input voltage range: 90 V AC to 264 V AC, 47 Hz to 63 Hz 	<ul style="list-style-type: none"> CloudEngine S5735-S48S4X
PAC1000S56-CB		
PAC150S12-R		

Power Module	Technical Specifications	Applied Switch Model
	<ul style="list-style-type: none"> Maximum input current: 3 A Maximum output current: 12.5 A Maximum output power: 150 W Hot swap: Supported 	
 <p>PDC180S12-CR</p>	<ul style="list-style-type: none"> Dimensions (H x W x D): 40 mm x 90 mm x 215 mm (1.6 in. x 3.5 in. x 8.5 in.) Weight: 0.62 kg (1.37 lb) Rated input voltage range: -48 V DC to -60 V DC Maximum input voltage range: -38.4 V DC to -72 V DC Maximum input current: 6 A Maximum output current: 15 A Maximum output power: 180 W Hot swap: Supported 	<ul style="list-style-type: none"> CloudEngine S5735-S24T4X CloudEngine S5735-S32ST4X CloudEngine S5735-S48S4X CloudEngine S5735-S48T4X
 <p>PDC1000S12-DB</p>	<ul style="list-style-type: none"> Dimensions (H x W x D): 40 mm x 90 mm x 215 mm (1.6 in. x 3.5 in. x 8.5 in.) Weight: 1.02 kg (2.25 lb) Rated input voltage range: -48 V DC to -60 V DC Maximum input voltage range: -38.4 V DC to -72 V DC Maximum input current: 30 A Maximum output current: 83.3 A Maximum output power: 1000 W Hot swap: Supported 	<ul style="list-style-type: none"> CloudEngine S5735-S24T4X CloudEngine S5735-S32ST4X CloudEngine S5735-S48S4X CloudEngine S5735-S48T4X
 <p>PAC60S12-AR</p>	<ul style="list-style-type: none"> Dimensions (H x W x D): 40 mm x 90 mm x 215 mm (1.6 in. x 3.5 in. x 8.5 in.) Weight: 0.68 kg (1.5 lb) Rated input voltage range: <ul style="list-style-type: none"> 100 V AC to 240 V AC, 50/60 Hz 240 V DC Maximum input voltage range: <ul style="list-style-type: none"> 90 V AC to 264 V AC, 47 Hz to 63 Hz 190 V DC to 290 V DC Maximum input current: <ul style="list-style-type: none"> 100 V AC to 240 V AC: 2 A 240 V DC: 2 A Maximum output current: 5 A Maximum output power: 60 W Hot swap: Supported 	<ul style="list-style-type: none"> CloudEngine S5735-S24T4X CloudEngine S5735-S32ST4X CloudEngine S5735-S48T4X

CloudEngine S5735-S24P4X is a PoE switch. It has two power module slots, each of which can have a 1000 W PoE power module installed.

The following table lists its power supply configurations.

Power supply configurations of CloudEngine S5735-S24P4X

Power Module 1	Power Module 2	Available PoE Power	Maximum Number of Ports (Fully Loaded)
1000 W (220 V)	–	874 W	<ul style="list-style-type: none">802.3af (15.4 W per port): 24802.3at (30 W per port): 24
1000 W (110 V)	–	779 W	<ul style="list-style-type: none">802.3af (15.4 W per port): 24802.3at (30 W per port): 24
1000 W (220 V)	1000 W (220 V)	1600 W	<ul style="list-style-type: none">802.3af (15.4 W per port): 24802.3at (30 W per port): 24
1000 W (110 V)	1000 W (110 V)	1558 W	<ul style="list-style-type: none">802.3af (15.4 W per port): 24802.3at (30 W per port): 24

CloudEngine S5735-S48P4X is a PoE switch. It has two power module slots, each of which can have a 1000 W PoE power module installed.

The following table lists its power supply configurations.

Power supply configurations of CloudEngine S5735-S48P4X

Power Module 1	Power Module 2	Available PoE Power	Maximum Number of Ports (Fully Loaded)
1000 W (220 V)	–	874 W	<ul style="list-style-type: none">802.3af (15.4 W per port): 48802.3at (30 W per port): 29
1000 W (110 V)	–	779 W	<ul style="list-style-type: none">802.3af (15.4 W per port): 48802.3at (30 W per port): 25
1000 W (220 V)	1000 W (220 V)	1600 W	<ul style="list-style-type: none">802.3af (15.4 W per port): 48802.3at (30 W per port): 48
1000 W (110 V)	1000 W (110 V)	1558 W	<ul style="list-style-type: none">802.3af (15.4 W per port): 48802.3at (30 W per port): 48

NOTE

When a switch has two power modules installed, the two power modules work in redundancy mode to provide power for the chassis and in load balancing mode to provide power for PDs.

Product Features and Highlights

Powerful Service Processing Capability

- CloudEngine S5735-S supports a broad set of Layer 2/Layer 3 multicast protocols, such as PIM SM, PIM DM, PIM SSM, MLD, and IGMP snooping. This capability is ideal for high-definition video surveillance and video conferencing access.
- CloudEngine S5735-S provides multiple Layer 3 features including OSPF, IS-IS, BGP, and VRRP, meeting enterprises' access and aggregation service needs and enabling a variety of voice, video, and data applications.

Multiple Security Control Mechanisms

- CloudEngine S5735-S supports MAC address authentication, 802.1X authentication, and Portal authentication, and implements dynamic delivery of policies (VLAN, QoS, and ACL) to users.
- CloudEngine S5735-S provides a series of mechanisms to defend against DoS attacks and user-targeted attacks. DoS attacks are targeted at switches and include SYN flood, Land, Smurf, and ICMP flood attacks. User-targeted attacks include bogus DHCP server attacks, IP/MAC address spoofing, DHCP request flood, and changing of the DHCP CHADDR value.

- CloudEngine S5735-S sets up and maintains a DHCP snooping binding table, and discards the packets that do not match the table entries. The DHCP snooping trusted port feature ensures that users connect only to the authorized DHCP server.
- CloudEngine S5735-S supports strict ARP learning, which protects a network against ARP spoofing attacks to ensure that users can connect to the Internet normally.

Multiple Reliability Mechanisms

- CloudEngine S5735-S is equipped with two pluggable power modules that work in 1+1 redundancy backup mode. Mixed installation of AC and DC power modules is supported, allowing for flexible configuration of AC or DC power modules according to service requirements.
- In addition to supporting traditional Spanning Tree Protocol (STP), Rapid Spanning Tree Protocol (RSTP), and Multiple Spanning Tree Protocol (MSTP), CloudEngine S5735-S is also designed with Huawei-developed Smart Ethernet Protection (SEP) technology and the industry's latest Ethernet Ring Protection Switching (ERPS) technology. SEP is a ring protection protocol specific to the Ethernet link layer, and applies to various ring network topologies, such as open ring topology, closed ring topology, and cascading ring topology. This protocol is reliable, easy to maintain, and implements fast protection switching within 50 ms. ERPS is defined in ITU-T G.8032, and it implements millisecond-level protection switching based on traditional Ethernet MAC and bridging functions.
- CloudEngine S5735-S supports Smart Link, which implements backup of uplinks. One CloudEngine S5735-S switch can connect to multiple aggregation switches through multiple links, significantly improving reliability of access devices.
- CloudEngine S5735-S supports Ethernet OAM (IEEE 802.3ah/802.1ag) to fast-detect link faults.

Easy Network deployment

- CloudEngine S5735-S supports Super Virtual Fabric (SVF), which innovatively virtualizes the "core/aggregation switch + access switch + AP" into one logical device. This simplifies device management and achieves plug-and-play for access switches and APs. In addition, CloudEngine S5735-S supports service configuration templates. The templates are configured on core devices and automatically delivered to access devices, enabling centralized control, simplified service configuration, and flexible configuration adjustment. CloudEngine S5735-S functions as a client in an SVF system.
- CloudEngine S5735-S supports Huawei Easy Operation, a solution that provides zero-touch deployment, replacement of faulty devices without additional configuration, USB-based deployment, batch device configuration, and batch remote upgrade. The capabilities facilitate device deployment, upgrade, service provisioning, and other management and maintenance operations, and also greatly reduce O&M costs. CloudEngine S5735-S can be managed using SNMP v1/v2c/v3, CLI, web-based network management system, or SSH v2.0. Additionally, it supports RMON, multiple log hosts, port traffic statistics collection, and network quality analysis, which facilitate network optimization and reconstruction.

Mature IPv6 Technologies

- CloudEngine S5735-S uses the mature, stable VRP platform and supports IPv4/IPv6 dual stack, IPv6 RIPng, and IPv6 over IPv4 tunnels (including manual, 6-to-4, and ISATAP tunnels).
- CloudEngine S5735-S can be deployed on a pure IPv4 network, a pure IPv6 network, or a shared IPv4/IPv6 network, helping achieve IPv4-to-IPv6 transition.

Intelligent Stack (iStack)

- CloudEngine S5735-S supports intelligent stack (iStack). This technology combines multiple switches into a logical switch. Member switches in a stack implement redundancy backup to improve device reliability and use inter-device link aggregation to improve link reliability.
- iStack provides high network scalability. You can increase ports, bandwidth, and processing capacity of a stack by simply adding member switches to the stack.
- iStack also simplifies device configuration and management. After a stack is set up, multiple physical switches are virtualized into one logical device. You can log in to any member switch in the stack to manage all the member switches in the stack. CloudEngine S5735-S support stacking through electrical ports.

PoE Function

- **Perpetual PoE:** When a PoE switch is abnormal Power-off or the software version is upgraded, the power supply to PDs is not interrupted. This capability ensures that PDs are not powered off during the switch reboot.
- **Fast PoE:** PoE switches can supply power to PDs within seconds after they are powered on. This is different from common switches that generally take 1 to 3 minutes to start to supply power to PDs. When a PoE switch reboots due to a power

failure, the PoE switch continues to supply power to the PDs immediately after being powered on without waiting until it finishes reboot. This greatly shortens the power failure time of PDs.

Intelligent O&M

- CloudEngine S5735-S provides telemetry technology to collect device data in real time and send the data to Huawei campus network analyzer CampusInsight. The CampusInsight analyzes network data based on the intelligent fault identification algorithm, accurately displays the real-time network status, effectively demarcates and locates faults in a timely manner, and identifies network problems that affect user experience, accurately guaranteeing user experience.
- CloudEngine S5735-S supports a variety of intelligent O&M features for audio and video services, including the enhanced Media Delivery Index (eMDI). With this eMDI function, the switch can function as a monitored node to periodically conduct statistics and report audio and video service indicators to the CampusInsight platform. In this way, the CampusInsight platform can quickly demarcate audio and video service quality faults based on the results of multiple monitored nodes.
- Meanwhile, CloudEngine S5735-S supports the Sampled Flow (sFlow) function. It uses a method defined in the sFlow standard to sample traffic passing through it and sends sampled traffic to the collector in real time. The collected traffic statistics are used to generate statistical reports, helping enterprises maintain their networks.

Intelligent Upgrade

- CloudEngine S5735-S supports the intelligent upgrade feature. Specifically, CloudEngine S5735-S obtains the version upgrade path and downloads the newest version for upgrade from the Huawei Online Upgrade Platform (HOUP). The entire upgrade process is highly automated and achieves one-click upgrade. In addition, preloading the version is supported, which greatly shortens the upgrade time and service interruption time.
- The intelligent upgrade feature greatly simplifies device upgrade operations and makes it possible for the customer to upgrade the version independently. This greatly reduces the customer's maintenance costs. In addition, the upgrade policies on the HOUP platform standardize the upgrade operations, which greatly reduces the risk of upgrade failures.

Cloud Management

- The Huawei cloud management platform allows users to configure, monitor, and inspect switches on the cloud, reducing on-site deployment and O&M manpower costs and decreasing network OPEX. Huawei switches support both cloud management and on-premise management modes. These two management modes can be flexibly switched as required to achieve smooth evolution while maximizing return on investment (ROI).

OPS(Open Programmability System)

- CloudEngine S5735-S supports Open Programmability System (OPS), an open programmable system based on the Python language. IT administrators can program the O&M functions of a CloudEngine S5735-S switch through Python scripts to quickly innovate functions and implement intelligent O&M.

Licensing

CloudEngine S5735-S supports both the traditional feature-based licensing mode and the latest Huawei IDN One Software (N1 mode for short) licensing mode. The N1 mode is ideal for deploying Huawei CloudCampus Solution in the on-premises scenario, as it greatly enhances the customer experiences in purchasing and upgrading software services with simplicity.

Software Package Features in N1 Mode

Switch Functions	N1 Basic Software	N1 Foundation Software Package	N1 Advanced Software Package
Basic network functions: Layer 2 functions, IPv4, IPv6, SVF, and others Note: For details, see the Service Features	√	√	√
Basic network automation based on the iMaster NCE-Campus: <ul style="list-style-type: none"> ● Basic automation: Plug-and-play 	×	√	√

Switch Functions	N1 Basic Software	N1 Foundation Software Package	N1 Advanced Software Package
<ul style="list-style-type: none"> Basic monitoring: Application visualization NE management: Image and topology management and discovery 			
Advanced network automation and intelligent O&M: User access authentication and CampusInsight basic functions	x	x	√

Note: Only V200R019C10 and later versions can support N1 mode

Product Specifications

Functions and Features

Function and feature metrics for the CloudEngine S5735-S series

Function and Feature		Description	CloudEngine S5735-S Series switch
Ethernet features	Ethernet basics	Full-duplex, half-duplex, and auto-negotiation	Yes
		Rate auto-negotiation on an interface	Yes
		Auto MDI and MDI-X	Yes
		Flow control on an interface	Yes
		Jumbo frames	Yes
		Link aggregation	Yes
		Load balancing among links of a trunk	Yes
		Transparent transmission of Layer 2 protocol packets	Yes
		Device Link Detection Protocol (DLDP)	Yes
		Link Layer Discovery Protocol (LLDP)	Yes
		Link Layer Discovery Protocol-Media Endpoint Discovery (LLDP-MED)	Yes
		Interface isolation	Yes
		Broadcast traffic suppression on an interface	Yes
		Multicast traffic suppression on an interface	Yes
		Unknown unicast traffic suppression on an interface	Yes
		VLAN broadcast traffic suppression	Yes
VLAN multicast traffic suppression	Yes		
VLAN unknown unicast traffic	Yes		

Function and Feature	Description	CloudEngine S5735-S Series switch	
		suppression	
	VLAN	VLAN specification	4094
		VLANIF interface specification	1024
		Access mode	Yes
		Trunk mode	Yes
		Hybrid mode	Yes
		QinQ mode	Yes
		Default VLAN	Yes
		VLAN assignment based on interfaces	Yes
		VLAN assignment based on protocols	Yes
		VLAN assignment based on IP subnets	Yes
		VLAN assignment based on MAC addresses	Yes
		VLAN assignment based on MAC address + IP address	Yes
		VLAN assignment based on MAC address + IP address + interface number	Yes
		Adding double VLAN tags to packets based on interfaces	Yes
		VLAN mapping	Yes
		Selective QinQ	Yes
		MUX VLAN	Yes
		Voice VLAN	Yes
	Guest VLAN	Yes	
	GVRP	GARP	Yes
		GVRP	Yes
	VCMP	VCMP	Yes
	MAC	MAC address	32896(MAX)
		Automatic learning of MAC addresses	Yes
		Automatic aging of MAC addresses	Yes
		Static, dynamic, and blackhole MAC address entries	Yes
		Interface-based MAC address learning limiting	Yes
		Sticky MAC	Yes
		MAC address flapping detection	Yes

Function and Feature		Description	CloudEngine S5735-S Series switch
		MAC address spoofing defense	Yes
		Port bridge	Yes
	ARP	Static ARP	Yes
		Dynamic ARP	Yes
		ARP entry	8180(MAX)
		ARP aging detection	Yes
		Intra-VLAN proxy ARP	Yes
		Routed proxy ARP	Yes
Ethernet loop protection	MSTP	STP	Yes
		RSTP	Yes
		MSTP	Yes
		VBST	Yes
		BPDU protection	Yes
		Root protection	Yes
		Loop protection	Yes
		Defense against TC BPDU attacks	Yes
	Loopback detection	Loop detection on an interface	Yes
	SEP	SEP	Yes
	Smart Link	Smart Link	Yes
		Smart Link multi-instance	Yes
		Monitor Link	Yes
	RRPP	RRPP	Yes
		Single RRPP ring	Yes
		Tangent RRPP ring	Yes
		Intersecting RRPP ring	Yes
		Hybrid networking of RRPP rings and other ring networks	Yes
	ERPS	G.8032 v1	Yes
		G.8032 v2	Yes
		ERPS semi-ring topology	Yes
		ERPS closed-ring topology	Yes
	IPv4/IPv6 forwarding	IPv4 and unicast routing	IPv4 static routing
VRF			Yes
DHCP client			Yes

Function and Feature		Description	CloudEngine S5735-S Series switch
		DHCP server	Yes
		DHCP relay	Yes
		Routing policies	Yes
		IPv4 routes	8192(MAX)
		RIPv1	Yes
		RIPv2	Yes
		OSPF	Yes
		BGP/BGP4+	Yes
		IS-IS v4/IS-IS v6	Yes
		Policy-based routing (PBR)	Yes
	Multicast routing features	IGMPv1/v2/v3	Yes
		PIM-DM	Yes
		PIM-SM	Yes
		MSDP	Yes
		IPv4 multicast routes	1500(MAX)
		IPv6 multicast routes	1500(MAX)
		Multicast routing policies	Yes
		RPF	Yes
	IPv6 features	IPv6 protocol stack	Yes
		ND	Yes
		ND entry	3072(MAX)
		ND snooping	Yes
		DHCPv6 snooping	Yes
		RIPng	Yes
		DHCPv6 server	Yes
		DHCPv6 relay	Yes
		OSPFv3	Yes
		IPv6 routes	3072(MAX)
		VRRP6	Yes
		MLDv1/v2	Yes
		PIM-DM for IPv6	Yes
		PIM-SM for IPv6	Yes
	-	IGMPv1/v2/v3 snooping	Yes
		IGMP snooping proxy	Yes

Function and Feature		Description	CloudEngine S5735-S Series switch
		MLD snooping	Yes
		Multicast traffic suppression	Yes
		Inter-VLAN multicast replication	Yes
Device reliability	Stacking	Service interface-based stacking	Yes
		Maximum number of stacked devices	9
		Stack bandwidth (Bidirectional)	80Gbps(MAX)
	VRRP	VRRP standard protocol	Yes
Ethernet OAM	EFM (802.3ah)	Automatic discovery of links	Yes
		Link fault detection	Yes
		Link troubleshooting	Yes
		Remote loopback	Yes
	CFM (802.1ag)	Software-level CCM	Yes
		802.1ag MAC ping	Yes
		802.1ag MAC trace	Yes
	OAM association	Association between 802.1ag and 802.3ah	Yes
	Y.1731	Unidirectional delay and jitter measurement	Yes
		Bidirectional delay and jitter measurement	Yes
QoS features	Traffic classification	Traffic classification based on ACLs	Yes
		Configuring traffic classification priorities	Yes
		Matching the simple domains of packets	Yes
	Traffic behavior	Traffic filtering	Yes
		Traffic policing (CAR)	Yes
		Modifying the packet priorities	Yes
		Modifying the simple domains of packets	Yes
		Modifying the packet VLANs	Yes
	Traffic shaping	Traffic shaping on an egress interface	Yes
		Traffic shaping on queues on an interface	Yes
	Congestion avoidance	Tail drop	Yes
	Congestion management	Priority Queuing (PQ)	Yes
		Weighted Deficit Round Robin (WDRR)	Yes
		PQ+WDRR	Yes

Function and Feature		Description	CloudEngine S5735-S Series switch	
		Weighted Round Robin (WRR)	Yes	
		PQ+WRR	Yes	
ACL	Packet filtering at Layer 2 to Layer 4	Number of rules per IPv4 ACL	2432	
		Number of rules per IPv6 ACL	2432	
		Basic IPv4 ACL	Yes	
		Advanced IPv4 ACL	Yes	
		Basic IPv6 ACL	Yes	
		Advanced IPv6 ACL	Yes	
		Layer 2 ACL	Yes	
		User-defined ACL	Yes	
Configuration and maintenance	Login and configuration management	Command line interface (CLI)-based configuration	Yes	
		Console terminal service	Yes	
		Telnet terminal service	Yes	
		SSH v1.5	Yes	
		SSH v2.0	Yes	
		SNMP-based NMS for unified configuration	Yes	
		Web page-based configuration and management	Yes	
		EasyDeploy (client)	Yes	
		SVF	Yes	
		Cloud management	Yes	
		OPS	Yes	
		File system	Directory and file management	Directory and file management
	File upload and download			Yes
	Monitoring and maintenance	Monitoring and maintenance	eMDI	Yes
			Hardware monitoring	Yes
			Log information output	Yes
			Alarm information output	Yes
			Debugging information output	Yes
			Port mirroring	Yes
			Flow mirroring	Yes
			Remote mirroring	Yes
	Energy saving	Yes		

Function and Feature		Description	CloudEngine S5735-S Series switch
	Version upgrade	Version upgrade	Yes
		Version rollback	Yes
Security	ARP security	ARP packet rate limiting	Yes
		ARP anti-spoofing	Yes
		Association between ARP and STP	Yes
		Dynamic ARP Inspection (DAI)	Yes
		Static ARP Inspection (SAI)	Yes
		Egress ARP Inspection (EAI)	Yes
	IP security	ICMP attack defense	Yes
		IPSG for IPv4	Yes
		IPSG user capacity	1K
		IPSG for IPv6	Yes
		IPSGv6 user capacity	512
	Local attack defense	CPU attack defense	Yes
	MFF	MFF	Yes
	DHCP snooping	DHCP snooping	Yes
		Option 82 function	Yes
		Dynamic rate limiting for DHCP packets	Yes
	Attack defense	Defense against malformed packet attacks	Yes
		Defense against UDP flood attacks	Yes
		Defense against TCP SYN flood attacks	Yes
		Defense against ICMP flood attacks	Yes
		Defense against packet fragment attacks	Yes
Local URPF		Yes	
User access and authentication	AAA	Local authentication	Yes
		Local authorization	Yes
		RADIUS authentication	Yes
		RADIUS authorization	Yes
		RADIUS accounting	Yes
		HWTACACS authentication	Yes
		HWTACACS authorization	Yes
		HWTACACS accounting	Yes
	NAC	802.1X authentication	Yes

Function and Feature		Description	CloudEngine S5735-S Series switch
		MAC address authentication	Yes
		Portal authentication	Yes
		Hybrid authentication	Yes
	Policy association	Functioning as the access device	Yes
Network management	-	Ping	Yes
		Tracert	Yes
		NQA	Yes
		NTP	Yes
		sFlow	Yes
		SNMP v1	Yes
		SNMP v2c	Yes
		SNMP v3	Yes
		HTTP	Yes
		HTTPS	Yes
		NETCONF/YANG	Yes
RMON	Yes		
Interoperability	-	VLAN-based Spanning Tree (VBST)	Yes
		Link-type Negotiation Protocol (LNP)	Yes
		VLAN Central Management Protocol (VCMP)	Yes

NOTE

This content is applicable only to regions outside mainland China. Huawei reserves the right to interpret this content.

Hardware Specifications

Hardware specifications of the CloudEngine S5735-S24P4X/S24T4X/S32ST4X models

Item		CloudEngine S5735-S24P4X	CloudEngine S5735-S24T4X	CloudEngine S5735-S32ST4X
Physical specifications	Dimensions (H x W x D, mm)	43.6 mm x 442 mm x 420 mm	43.6 mm x 442 mm x 420 mm	43.6 mm x 442 mm x 420 mm
	Chassis height	1 U	1 U	1 U
	Chassis weight (including packaging)	7.39 kg	7.21 kg	7.47 kg
Fixed port	GE port	24(PoE+)	24	8
	GE SFP port			24
	10GE port	4	4	4

Item		CloudEngine S5735-S24P4X	CloudEngine S5735-S24T4X	CloudEngine S5735-S32ST4X
Management port	ETH management port	Supported	Supported	Supported
	Console port (RJ45)	Supported	Supported	Supported
	USB port	USB 2.0	USB 2.0	USB 2.0
CPU	Frequency	1000 MHz	1000 MHz	1000 MHz
	Cores	4	4	4
Storage	Memory (RAM)	1 GB	1 GB	1 GB
	Flash memory	Hardware: 512 MB, of which 306 MB is available for users	Hardware: 512 MB, of which 306 MB is available for users	Hardware: 512 MB, of which 306 MB is available for users
Power supply system	Power supply type	1000 W AC PoE	<ul style="list-style-type: none"> 60 W AC 180 W DC 1000 W DC 	<ul style="list-style-type: none"> 60 W AC 180 W DC 1000 W DC
	Power supply redundancy	1+1 NOTE The backup power supply is optional.	1+1 NOTE The backup power supply is optional.	1+1 NOTE The backup power supply is optional.
	Rated voltage range	AC input (1000 W AC PoE): 100 V AC to 240 V AC, 50/60 Hz	<ul style="list-style-type: none"> AC input (60 W AC): 100 V AC to 240 V AC, 50/60 Hz DC input (180/1000 W DC): -48 VDC to -60 V DC 	<ul style="list-style-type: none"> AC input (60 W AC): 100 V AC to 240 V AC, 50/60 Hz DC input (180/1000 W DC): -48 VDC to -60 V DC
	Maximum voltage range	<ul style="list-style-type: none"> AC input (1000 W AC PoE): 90 V AC to 290 V AC, 45 Hz to 65 Hz High-voltage DC input (1000 W AC PoE): 190 V DC to 290 V DC (meeting 240 V high-voltage DC certification) 	<ul style="list-style-type: none"> AC input (60 W AC): 90 V AC to 264 V AC, 47 Hz to 63 Hz High-voltage DC input (60 W AC): 190 V DC to 290 V DC (meeting 240 V high-voltage DC certification) DC input (180/1000 W DC): -38.4 V DC to -72V DC 	<ul style="list-style-type: none"> AC input (60 W AC): 90 V AC to 264 V AC, 47 Hz to 63 Hz High-voltage DC input (60 W AC): 190 V DC to 290 V DC (meeting 240 V high-voltage DC certification) DC input (180/1000 W DC): -38.4 V DC to -72V DC
	Maximum input current	8 A	<ul style="list-style-type: none"> 60 W AC: 2 A 1000 W DC: 30 A 	<ul style="list-style-type: none"> 60 W AC: 2 A 1000 W DC: 30 A
	Maximum power consumption of the device	<ul style="list-style-type: none"> 65 W (without PD) 847 W (with PD, PD power consumption of 720 W) 	46 W	66 W
	Power consumption in the case of 30% traffic load ¹	51 W	31 W	47 W

Item		CloudEngine S5735-S24P4X	CloudEngine S5735-S24T4X	CloudEngine S5735-S32ST4X
	Power consumption in the case of 100% traffic load ¹	56 W	35 W	49 W
Heat dissipation system	Heat dissipation mode	Air-cooled heat dissipation and intelligent fan speed adjustment	Air-cooled heat dissipation and intelligent fan speed adjustment	Air-cooled heat dissipation and intelligent fan speed adjustment
	Number of fan modules	2	2	2
	Airflow	Air flows in from the left,right sides and front panel, exhausts from the rear panel	Air flows in from the left,right sides and front panel, exhausts from the rear panel	Air flows in from the left,right sides and front panel, exhausts from the rear panel
	Maximum heat dissipation of the device (BTU/hour)	<ul style="list-style-type: none"> Without PDs: 221.8 With PDs: 2890 	157	225.2
Environment parameters	Long-term operating temperature	<ul style="list-style-type: none"> 0-1800 m altitude: 0°C to +50°C 1800-5000 m altitude: The operating temperature reduces by 1°C every time the altitude increases by 220 m. 	<ul style="list-style-type: none"> 0-1800 m altitude: 0°C to +50°C 1800-5000 m altitude: The operating temperature reduces by 1°C every time the altitude increases by 220 m. 	<ul style="list-style-type: none"> 0-1800 m altitude: 0°C to +50°C 1800-5000 m altitude: The operating temperature reduces by 1°C every time the altitude increases by 220 m.
	Short-term operating temperature ³	<ul style="list-style-type: none"> 0-1800 m altitude: -5°C to +55°C 1800-5000 m altitude: The operating temperature reduces by 1°C every time the altitude increases by 220 m. 	<ul style="list-style-type: none"> 0-1800 m altitude: -5°C to +55°C 1800-5000 m altitude: The operating temperature reduces by 1°C every time the altitude increases by 220 m. 	<ul style="list-style-type: none"> 0-1800 m altitude: -5°C to +55°C 1800-5000 m altitude: The operating temperature reduces by 1°C every time the altitude increases by 220 m.
	Storage temperature	-40°C to +70°C	-40°C to +70°C	-40°C to +70°C
	Relative humidity	5% to 95% (non-condensing)	5% to 95% (non-condensing)	5% to 95% (non-condensing)
	Operating altitude	5000 m	5000 m	5000 m
	Noise under normal temperature (sound power)	58.9 dB(A)	58.9 dB(A)	59.3 dB(A)
	Noise under high temperature (sound power)	75 dB(A)	75 dB(A)	75.4 dB(A)

Item		CloudEngine S5735-S24P4X	CloudEngine S5735-S24T4X	CloudEngine S5735-S32ST4X
	Noise under normal temperature (sound pressure)	43.8 dB(A)	43.8 dB(A)	44.2 dB(A)
	Surge protection specification (RJ45 service port)	±7 kV in common mode	±7 kV in common mode	±7 kV in common mode
	Surge protection specification (power port)	±6 kV in differential mode, ±6 kV in common mode	<ul style="list-style-type: none"> AC power port: ±6 kV in differential mode, ±6 kV in common mode DC power port: ±2 kV in differential mode, ±4 kV in common mode 	<ul style="list-style-type: none"> AC power port: ±6 kV in differential mode, ±6 kV in common mode DC power port: ±2 kV in differential mode, ±4 kV in common mode
Reliability	MTBF (year) ²	59.88	69.42	68.59
	MTTR (hour)	2	1.73	1.75
	Availability	> 0.99999	> 0.99999	> 0.99999
Certification		<ul style="list-style-type: none"> EMC certification Safety certification Manufacturing certification 	<ul style="list-style-type: none"> EMC certification Safety certification Manufacturing certification 	<ul style="list-style-type: none"> EMC certification Safety certification Manufacturing certification

Hardware specifications of the CloudEngine S5735-S48P4X/-S48S4X/-S48T4X models

Item		CloudEngine S5735-S48P4X	CloudEngine S5735-S48S4X	CloudEngine S5735-S48T4X
Physical specifications	Dimensions (W x D x H, mm)	43.6 mm x 442 mm x 420 mm	43.6 mm x 442 mm x 420 mm	43.6 mm x 442 mm x 420 mm
	Chassis height	1 U	1 U	1 U
	Chassis weight (including packaging)	7.64 kg	8.27 kg	7.69 kg
Fixed port	GE port	48(PoE+)	48	48
	10GE port	4	4	4
Management port	ETH management port	Supported	Supported	Supported
	Console port (RJ45)	Supported	Supported	Supported
	USB port	USB 2.0	USB 2.0	USB 2.0

Item		CloudEngine S5735-S48P4X	CloudEngine S5735-S48S4X	CloudEngine S5735-S48T4X
CPU	Frequency	1000 MHz	1000 MHz	1000 MHz
	Cores	4	4	4
Storage	Memory (RAM)	1 GB	1 GB	1 GB
	Flash memory	Hardware: 512 MB, of which 306 MB is available for users	Hardware: 512 MB, of which 306 MB is available for users	Hardware: 512 MB, of which 306 MB is available for users
Power supply system	Power supply type	1000 W AC PoE	<ul style="list-style-type: none"> 150 W AC 180 W DC 1000 W DC 	<ul style="list-style-type: none"> 60 W AC 180 W DC 1000 W DC
	Power supply redundancy	1+1 NOTE The backup power supply is optional.	1+1 NOTE The backup power supply is optional.	1+1 NOTE The backup power supply is optional.
	Rated voltage range	AC input (1000 W AC PoE): 100 V AC to 240 V AC, 50/60 Hz	<ul style="list-style-type: none"> AC input (150 W AC): 100 V AC to 240 V AC, 50/60 Hz DC input (180/1000 W DC): -48 VDC to -60 V DC 	<ul style="list-style-type: none"> AC input (60 W AC): 100 V AC to 240 V AC, 50/60 Hz DC input (180/1000 W DC): -48 VDC to -60 V DC
	Maximum voltage range	<ul style="list-style-type: none"> AC input (1000 W AC PoE): 90 V AC to 290 V AC, 45 Hz to 65 Hz High-voltage DC input (1000 W AC PoE): 190 V DC to 290 V DC (meeting 240 V high-voltage DC certification) 	<ul style="list-style-type: none"> AC input (150 W AC): 90 V AC to 264 V AC, 47 Hz to 63 Hz DC input (180/1000 W DC): -38.4 V DC to -72V DC 	<ul style="list-style-type: none"> AC input (60 W AC): 90 V AC to 264 V AC, 47 Hz to 63 Hz High-voltage DC input (60 W AC): 190 V DC to 290 V DC (meeting 240 V high-voltage DC certification) DC input (180/1000 W DC): -38.4 V DC to -72V DC
	Maximum input current	8 A	<ul style="list-style-type: none"> 150 W AC: 3 A 1000 W DC: 30 A 	<ul style="list-style-type: none"> 60 W AC: 2 A 1000 W DC: 30 A
	Maximum power consumption of the device	<ul style="list-style-type: none"> 77 W (without PD) 1661 W (with PD, PD power consumption of 1600 W) 	89 W	59 W
	Power consumption in the case of 30% traffic load ¹	59 W	67 W	40 W
	Power consumption in the case of 100% traffic load ¹	68 W	71 W	48 W
Heat dissipation	Heat dissipation mode	Air-cooled heat dissipation and intelligent fan speed	Air-cooled heat dissipation and intelligent fan speed	Air-cooled heat dissipation and intelligent fan speed

Item		CloudEngine S5735-S48P4X	CloudEngine S5735-S48S4X	CloudEngine S5735-S48T4X
system		adjustment	adjustment	fan speed adjustment
	Number of fan modules	2	3	2
	Airflow	Air flows in from the left,right sides and front panel, exhausts from the rear panel	Air flows in from the left,right sides and front panel, exhausts from the rear panel	Air flows in from the left,right sides and front panel, exhausts from the rear panel
	Maximum heat dissipation of the device (BTU/hour)	<ul style="list-style-type: none"> Without PDs: 262.7 With PDs: 5667 	303.7	201.3
Environment parameters	Long-term operating temperature	<ul style="list-style-type: none"> 0-1800 m altitude: 0°C to +50°C 1800-5000 m altitude: The operating temperature reduces by 1°C every time the altitude increases by 220 m. 	<ul style="list-style-type: none"> 0-1800 m altitude: 0°C to +50°C 1800-5000 m altitude: The operating temperature reduces by 1°C every time the altitude increases by 220 m. 	<ul style="list-style-type: none"> 0-1800 m altitude: 0°C to +50°C 1800-5000 m altitude: The operating temperature reduces by 1°C every time the altitude increases by 220 m.
	Short-term operating temperature ³	<ul style="list-style-type: none"> 0-1800 m altitude: -5°C to +55°C 1800-5000 m altitude: The operating temperature reduces by 1°C every time the altitude increases by 220 m. 	<ul style="list-style-type: none"> 0-1800 m altitude: -5°C to +55°C 1800-5000 m altitude: The operating temperature reduces by 1°C every time the altitude increases by 220 m. 	<ul style="list-style-type: none"> 0-1800 m altitude: -5°C to +55°C 1800-5000 m altitude: The operating temperature reduces by 1°C every time the altitude increases by 220 m.
	Storage temperature	-40°C to +70°C	-40°C to +70°C	-40°C to +70°C
	Relative humidity	5% to 95% (non-condensing)	5% to 95% (non-condensing)	5% to 95% (non-condensing)
	Operating altitude	5000 m	5000 m	5000 m
	Noise under normal temperature (sound power)	58.9dB (A)	61dB (A)	58.9dB (A)
	Noise under high temperature (sound power)	75dB (A)	75.7dB (A)	75dB (A)
	Noise under normal temperature (sound pressure)	43.8dB (A)	46dB (A)	43.8dB (A)
	Surge protection specification (RJ45 service port)	±7 kV in common mode	NA	±7 kV in common mode

Item		CloudEngine S5735-S48P4X	CloudEngine S5735-S48S4X	CloudEngine S5735-S48T4X
	Surge protection specification (power port)	±6 kV in differential mode, ±6 kV in common mode	<ul style="list-style-type: none"> AC power port: ±6 kV in differential mode, ±6 kV in common mode DC power port: ±2 kV in differential mode, ±4 kV in common mode 	<ul style="list-style-type: none"> AC power port: ±6 kV in differential mode, ±6 kV in common mode DC power port: ±2 kV in differential mode, ±4 kV in common mode
Reliability	MTBF (year) ²	54.88	66.33	74.7
	MTTR (hour)	2.19	1.81	1.61
	Availability	> 0.99999	> 0.99999	> 0.99999
Certification		<ul style="list-style-type: none"> EMC certification Safety certification Manufacturing certification 	<ul style="list-style-type: none"> EMC certification Safety certification Manufacturing certification 	<ul style="list-style-type: none"> EMC certification Safety certification Manufacturing certification


NOTE

- 1: The power consumption under different load conditions is calculated according to the ATIS standard. Additionally, the EEE function is enabled and there is no PoE power output.
- 2: The reliability parameter values are calculated based on the typical configuration of the device. The parameter values vary according to the modules configured by the customer.
- 3: Short term indicates that the successive operating time is no more than 96 hours, the total operating time is no more than 360 hours, or the number of times the operating temperature is over 45 ° C is no more than 15 in a year.

Networking and Applications


Large-Scale Enterprise Campus Network

CloudEngine S5735-S series switches can be deployed at the access layer of a campus network to build a high-performance and highly reliable enterprise network.

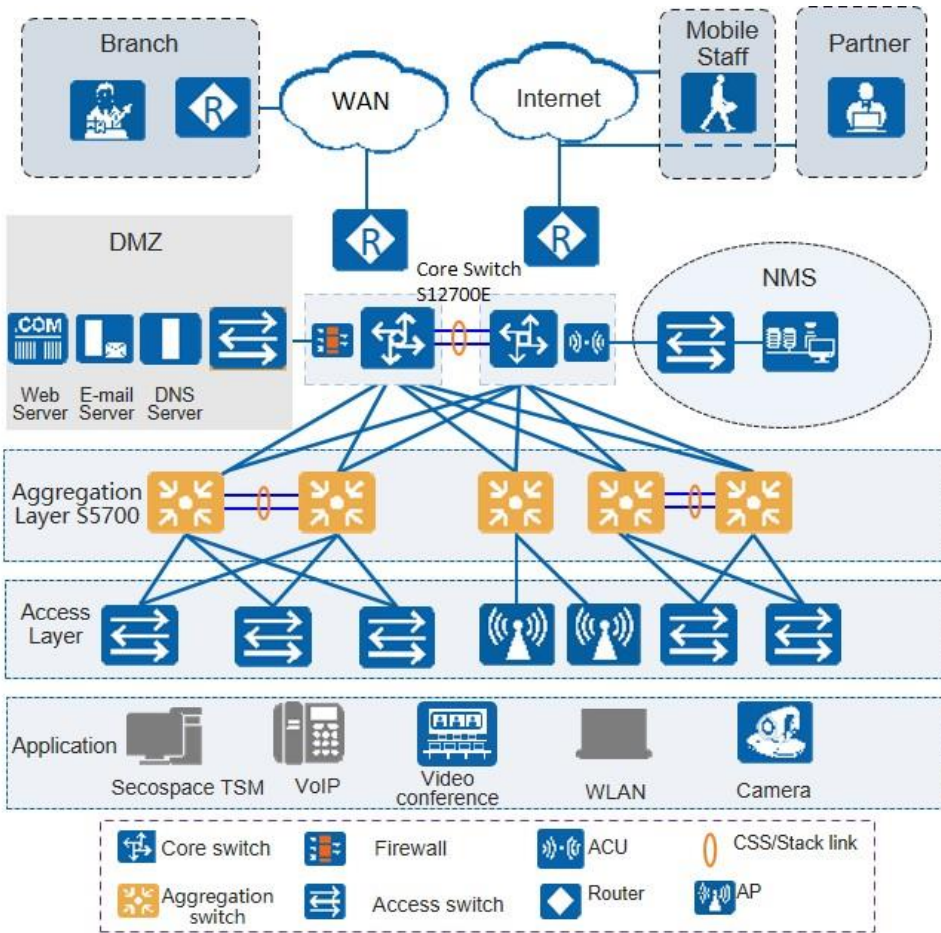


Small- or Medium-scale Enterprise Campus Network

CloudEngine S5735-S series switches can be deployed at the aggregation layer of a campus network to build a high-performance, multi-service, and highly reliable enterprise network.

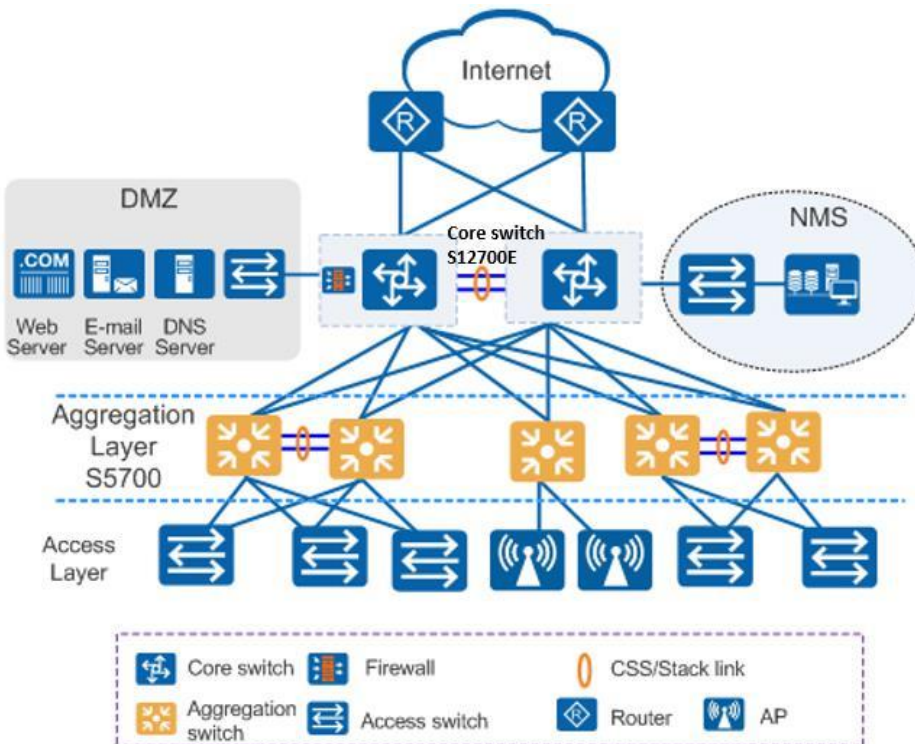


Small-scale Enterprise Campus Network

With powerful aggregation and routing capabilities of CloudEngine S5735-S series switches make them suitable for use as core switches in a small-scale enterprise network. Two or more S5735-S switches use iStack technology to ensure high reliability. They provide a variety of access control policies to achieve centralized management and simplify configuration.

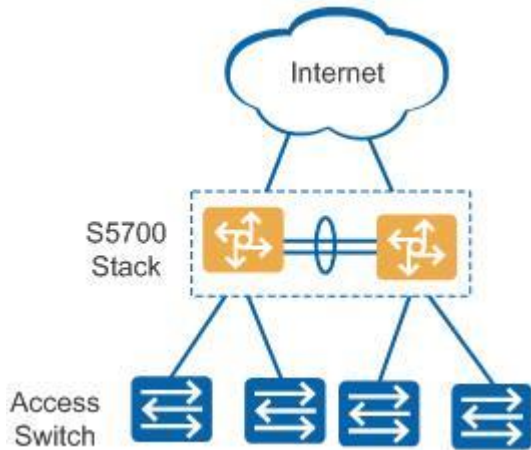

Application on a MAN

CloudEngine S5735-S series switches can be deployed at the access layer of a MAN(Metropolitan Area Network) to build a high-performance, multi-service, and highly reliable ISP MAN network.

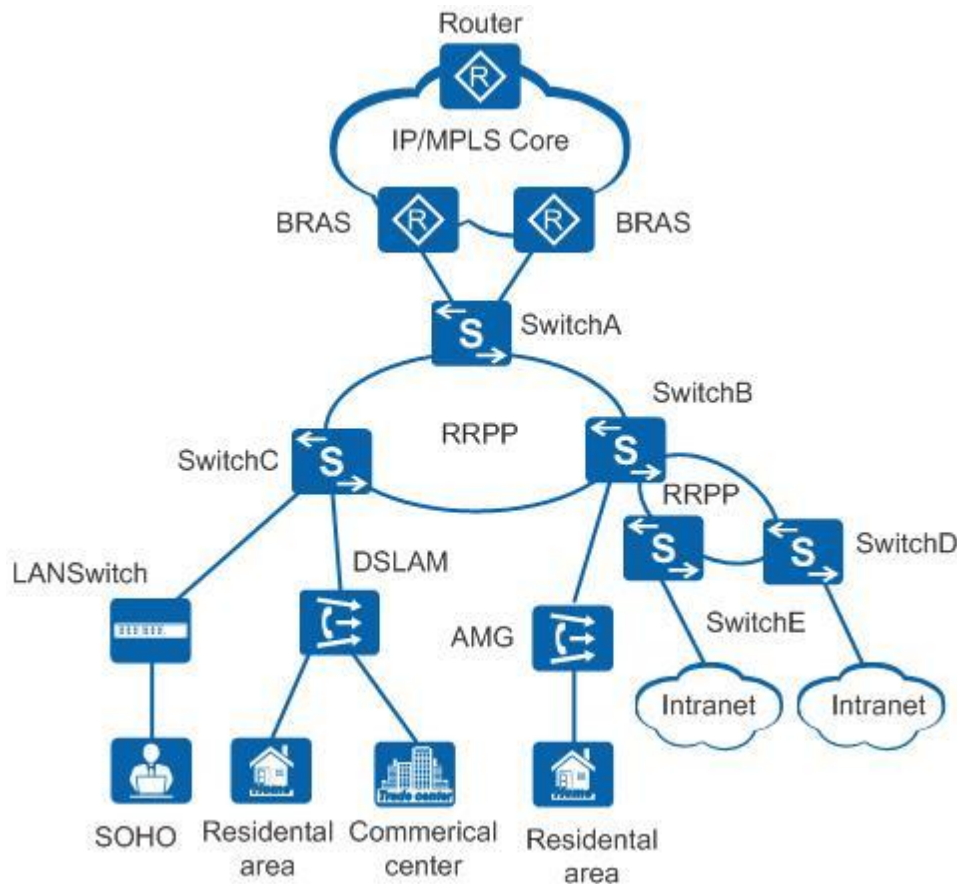


Application in Public Cloud

CloudCampus Solution is a network solution suite based on Huawei public cloud. CloudEngine S5735-S series switches can be located at the access layer.

The switches are plug-and-play. They go online automatically after being powered on and connected with network cables, without the need for complex configurations. The switches can connect to the management and control system

(CloudCampus@AC-Campus for switches running V200R019C00 and earlier versions; iMaster NCE-Campus for switches running V200R019C10 and later versions), and use bidirectional certificate authentication to ensure management channel security. The switches provide the NETCONF and YANG interfaces, through which the management and control system delivers configurations to them. In addition, remote maintenance and fault diagnosis can be performed on the management and control system.

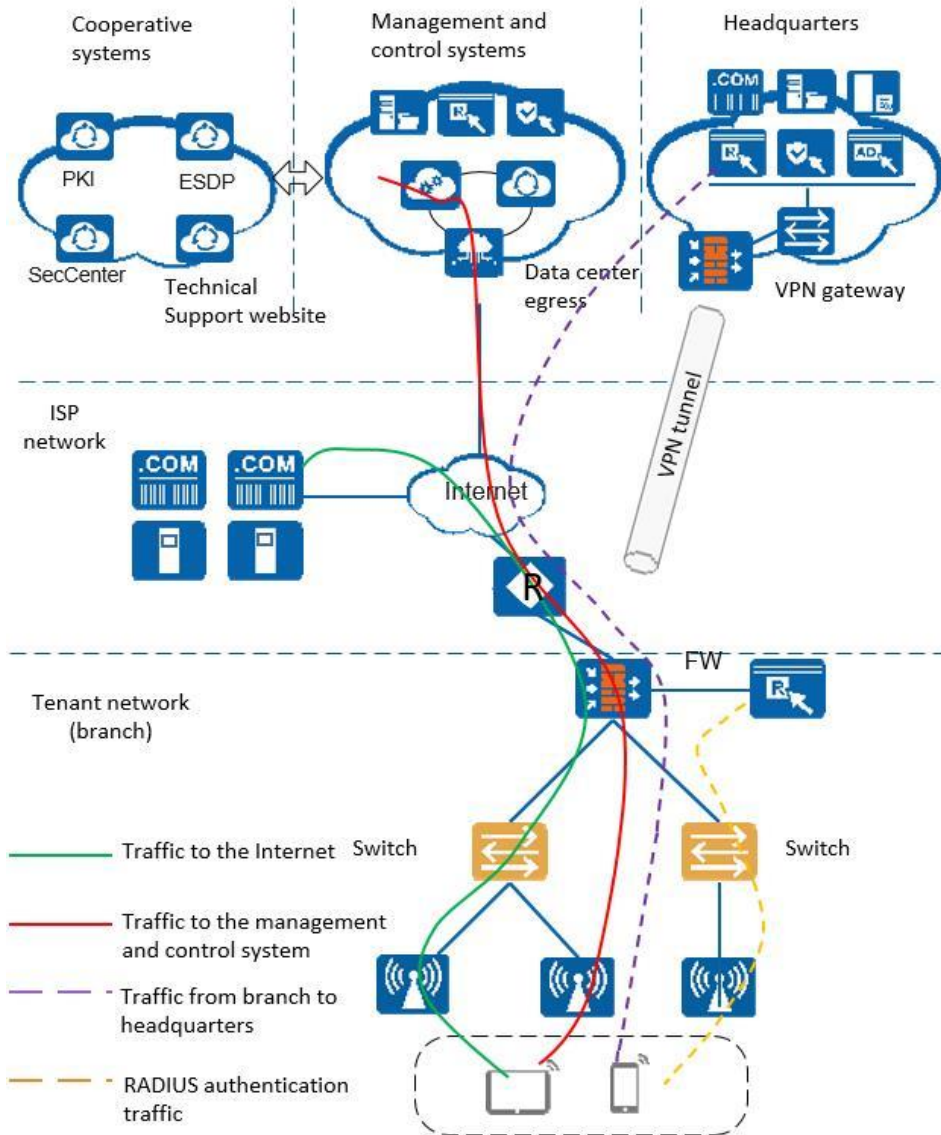

Safety and Regulatory Compliance

Certification Category	Description
Safety	<ul style="list-style-type: none"> • IEC 60950-1 • EN 60950-1/A11/A12 • UL 60950-1 • CSA C22.2 No 60950-1 • AS/NZS 60950.1 • CNS 14336-1 • IEC60825-1 • IEC60825-2 • EN60825-1

Certification Category	Description
	<ul style="list-style-type: none"> • EN60825-2
Electromagnetic Compatibility (EMC)	<ul style="list-style-type: none"> • CISPR22 Class A • CISPR24 • EN55022 Class A • EN55024 • ETSI EN 300 386 Class A • CFR 47 FCC Part 15 Class A • ICES 003 Class A • AS/NZS CISPR22 Class A • VCCI Class A • IEC61000-4-2 • ITU-T K 20 • ITU-T K 21 • ITU-T K 44 • CNS13438
Environment	<ul style="list-style-type: none"> • RoHS • REACH • WEEE

NOTE

- EMC: electromagnetic compatibility
- CISPR: International Special Committee on Radio Interference
- EN: European Standard
- ETSI: European Telecommunications Standards Institute
- CFR: Code of Federal Regulations
- FCC: Federal Communication Commission
- IEC: International Electrotechnical Commission
- AS/NZS: Australian/New Zealand Standard
- VCCI: Voluntary Control Council for Interference
- UL: Underwriters Laboratories
- CSA: Canadian Standards Association
- IEEE: Institute of Electrical and Electronics Engineers
- RoHS: restriction of the use of certain hazardous substances
- REACH: Registration Evaluation Authorization and Restriction of Chemicals
- WEEE: Waste Electrical and Electronic Equipment

MIB and Standards Compliance

Supported MIBs

Category	MIB
Public MIB	<ul style="list-style-type: none"> • BRIDGE-MIB • DISMAN-NSLOOKUP-MIB • DISMAN-PING-MIB • DISMAN-TRACEROUTE-MIB

Category	MIB
	<ul style="list-style-type: none"> • ENTITY-MIB • EtherLike-MIB • IF-MIB • IP-FORWARD-MIB • IPv6-MIB • LAG-MIB • LLDP-EXT-DOT1-MIB • LLDP-EXT-DOT3-MIB • LLDP-MIB • NOTIFICATION-LOG-MIB • NQA-MIB • OSPF-TRAP-MIB • P-BRIDGE-MIB • Q-BRIDGE-MIB • RFC1213-MIB • RIPv2-MIB • RMON-MIB • SAVI-MIB • SNMP-FRAMEWORK-MIB • SNMP-MPD-MIB • SNMP-NOTIFICATION-MIB • SNMP-TARGET-MIB • SNMP-USER-BASED-SM-MIB • SNMPv2-MIB • TCP-MIB • UDP-MIB
Huawei-proprietary MIB	<ul style="list-style-type: none"> • HUAWEI-AAA-MIB • HUAWEI-ACL-MIB • HUAWEI-ALARM-MIB • HUAWEI-ALARM-RELIABILITY-MIB • HUAWEI-BASE-TRAP-MIB • HUAWEI-BRAS-RADIUS-MIB • HUAWEI-BRAS-SRVCFG-EAP-MIB • HUAWEI-BRAS-SRVCFG-STATICUSER-MIB • HUAWEI-CBQOS-MIB • HUAWEI-CDP-COMPLIANCE-MIB • HUAWEI-CONFIG-MAN-MIB • HUAWEI-CPU-MIB • HUAWEI-DAD-TRAP-MIB • HUAWEI-DC-MIB • HUAWEI-DATASYNC-MIB • HUAWEI-DEVICE-MIB • HUAWEI-DHCPR-MIB • HUAWEI-DHCPS-MIB

Category	MIB
	<ul style="list-style-type: none"> • HUAWEI-DHCP-SNOOPING-MIB • HUAWEI-DIE-MIB • HUAWEI-DNS-MIB • HUAWEI-DLDP-MIB • HUAWEI-ELMI-MIB • HUAWEI-ERPS-MIB • HUAWEI-ERRORDOWN-MIB • HUAWEI-ENERGYMNGT-MIB • HUAWEI-EASY-OPERATION-MIB • HUAWEI-ENTITY-EXTENT-MIB • HUAWEI-ENTITY-TRAP-MIB • HUAWEI-ETHARP-MIB • HUAWEI-ETHOAM-MIB • HUAWEI-FLASH-MAN-MIB • HUAWEI-FWD-RES-TRAP-MIB • HUAWEI-GARP-APP-MIB • HUAWEI-GTSM-MIB • HUAWEI-HGMP-MIB • HUAWEI-HWTACACS-MIB • HUAWEI-IF-EXT-MIB • HUAWEI-INFOCENTER-MIB • HUAWEI-IPPOOL-MIB • HUAWEI-IPV6-MIB • HUAWEI-ISOLATE-MIB • HUAWEI-L2IF-MIB • HUAWEI-L2MAM-MIB • HUAWEI-L2VLAN-MIB • HUAWEI_LDT-MIB • HUAWEI-LLDP-MIB • HUAWEI-MAC-AUTHEN-MIB • HUAWEI-MEMORY-MIB • HUAWEI-MFF-MIB • HUAWEI-MFLP-MIB • HUAWEI-MSTP-MIB • HUAWEI-MULTICAST-MIB • HUAWEI-NAP-MIB • HUAWEI-NTPV3-MIB • HUAWEI-PERFORMANCE-MIB • HUAWEI-PORT-MIB • HUAWEI-PORTAL-MIB • HUAWEI-QINQ-MIB • HUAWEI-RIPv2-EXT-MIB • HUAWEI-RM-EXT-MIB • HUAWEI-RRPP-MIB • HUAWEI-SECURITY-MIB

Category	MIB
	<ul style="list-style-type: none"> • HUAWEI-SEP-MIB • HUAWEI-SNMP-EXT-MIB • HUAWEI-SSH-MIB • HUAWEI-STACK-MIB • HUAWEI-SWITCH-L2MAM-EXT-MIB • HUAWEI-SWITCH-SRV-TRAP-MIB • HUAWEI-SYS-MAN-MIB • HUAWEI-TCP-MIB • HUAWEI-TFTPC-MIB • HUAWEI-TRNG-MIB • HUAWEI-XQOS-MIB

NOTE

For more detailed information of MIBs supported by the CloudEngine S5735-S series, visit <https://support.huawei.com/enterprise/en/switches/s5700-pid-6691579?category=reference-guides&subcategory=mib-reference>.

Standard Compliance

Standard Organization	Standard or Protocol
IETF	<ul style="list-style-type: none"> • RFC 768 User Datagram Protocol (UDP) • RFC 792 Internet Control Message Protocol (ICMP) • RFC 793 Transmission Control Protocol (TCP) • RFC 826 Ethernet Address Resolution Protocol (ARP) • RFC 854 Telnet Protocol Specification • RFC 951 Bootstrap Protocol (BOOTP) • RFC 959 File Transfer Protocol (FTP) • RFC 1058 Routing Information Protocol (RIP) • RFC 1112 Host extensions for IP multicasting • RFC 1157 A Simple Network Management Protocol (SNMP) • RFC 1256 ICMP Router Discovery • RFC 1305 Network Time Protocol Version 3 (NTP) • RFC 1349 Internet Protocol (IP) • RFC 1493 Definitions of Managed Objects for Bridges • RFC 1542 Clarifications and Extensions for the Bootstrap Protocol • RFC 1643 Ethernet Interface MIB • RFC 1757 Remote Network Monitoring (RMON) • RFC 1901 Introduction to Community-based SNMPv2 • RFC 1902-1907 SNMP v2 • RFC 1981 Path MTU Discovery for IP version 6 • RFC 2131 Dynamic Host Configuration Protocol (DHCP) • RFC 2328 OSPF Version 2 • RFC 2453 RIP Version 2 • RFC 2460 Internet Protocol, Version 6 Specification (IPv6) • RFC 2461 Neighbor Discovery for IP Version 6 (IPv6) • RFC 2462 IPv6 Stateless Address Auto configuration

Standard Organization	Standard or Protocol
	<ul style="list-style-type: none"> • RFC 2463 Internet Control Message Protocol for IPv6 (ICMPv6) • RFC 2474 Differentiated Services Field (DS Field) • RFC 2740 OSPF for IPv6 (OSPFv3) • RFC 2863 The Interfaces Group MIB • RFC 2597 Assured Forwarding PHB Group • RFC 2598 An Expedited Forwarding PHB • RFC 2571 SNMP Management Frameworks • RFC 2865 Remote Authentication Dial In User Service (RADIUS) • RFC 3046 DHCP Option82 • RFC 3376 Internet Group Management Protocol, Version 3 (IGMPv3) • RFC 3513 IP Version 6 Addressing Architecture • RFC 3579 RADIUS Support For EAP • RFC 4271 A Border Gateway Protocol 4 (BGP-4) • RFC 4760 Multiprotocol Extensions for BGP-4 • draft-grant-tacacs-02 TACACS+
IEEE	<ul style="list-style-type: none"> • IEEE 802.1D Media Access Control (MAC) Bridges • IEEE 802.1p Traffic Class Expediting and Dynamic Multicast Filtering • IEEE 802.1Q Virtual Bridged Local Area Networks • IEEE 802.1ad Provider Bridges • IEEE 802.2 Logical Link Control • IEEE Std 802.3 CSMA/CD • IEEE Std 802.3ab 1000BASE-T specification • IEEE Std 802.3ad Aggregation of Multiple Link Segments • IEEE Std 802.3ae 10GE WEN/LAN Standard • IEEE Std 802.3x Full Duplex and flow control • IEEE Std 802.3z Gigabit Ethernet Standard • IEEE802.1ax/IEEE802.3ad Link Aggregation • IEEE 802.3ah Ethernet in the First Mile • IEEE 802.1ag Connectivity Fault Management • IEEE 802.1ab Link Layer Discovery Protocol • IEEE 802.1D Spanning Tree Protocol • IEEE 802.1w Rapid Spanning Tree Protocol • IEEE 802.1s Multiple Spanning Tree Protocol • IEEE 802.1x Port based network access control protocol • IEEE 802.3af DTE Power via MIDI • IEEE 802.3at DTE Power via the MDI Enhancements
ITU	<ul style="list-style-type: none"> • ITU SG13 Y.17ethoam • ITU SG13 QoS control Ethernet-Based IP Access • ITU-T Y.1731 ETH OAM performance monitor
ISO	<ul style="list-style-type: none"> • ISO 10589 IS-IS Routing Protocol
MEF	<ul style="list-style-type: none"> • MEF 2 Requirements and Framework for Ethernet Service Protection • MEF 9 Abstract Test Suite for Ethernet Services at the UNI • MEF 10.2 Ethernet Services Attributes Phase 2

Standard Organization	Standard or Protocol
	<ul style="list-style-type: none"> • MEF 11 UNI Requirements and Framework • MEF 13 UNI Type 1 Implementation Agreement • MEF 15 Requirements for Management of Metro Ethernet Phase 1 Network Elements • MEF 17 Service OAM Framework and Requirements • MEF 20 UNI Type 2 Implementation Agreement • MEF 23 Class of Service Phase 1 Implementation Agreement • XMODEM/YMODEM Protocol Reference

Ordering Information

The following table lists ordering information of the CloudEngine S5735-S series switches.

Model	Product Description
CloudEngine S5735-S24T4X	CloudEngine S5735-S24T4X (24 x 10/100/1000Base-T ports, 4 x 10 GE SFP+ ports, without power module)
CloudEngine S5735-S24P4X	CloudEngine S5735-S24P4X (24 x 10/100/1000Base-T ports, 4 x 10 GE SFP+ ports, PoE+, without power module)
CloudEngine S5735-S48T4X	CloudEngine S5735-S48T4X (48 x 10/100/1000Base-T ports, 4 x 10 GE SFP+ ports, without power module)
CloudEngine S5735-S48P4X	CloudEngine S5735-S48P4X (48 x 10/100/1000Base-T ports, 4 x 10 GE SFP+ ports, PoE+, without power module)
CloudEngine S5735-S32ST4X	CloudEngine S5735-S32ST4X (24 x GE SFP ports, 8 x 10/100/1000Base-T ports, 4 x 10 GE SFP+ ports, without power module)
CloudEngine S5735-S48S4X	CloudEngine S5735-S48S4X (48 x GE SFP ports, 4 x 10 GE SFP+ port, without power module)
PAC1000S56-CB	1000 W AC PoE power module, used in PoE models
PDC180S12-CR	180 W DC power module, used in Non-PoE models
PDC1000S12-DB	1000 W DC power module, used in Non-PoE models
PAC150S12-R	150 W AC power module, used in CloudEngine S5735-S48S4X
PAC60S12-AR	60 W AC power module
N1-S57S-M-Lic	S57XX-S Series Basic SW,Per Device
N1-S57S-M-SnS1Y	S57XX-S Series Basic SW,SnS,Per Device,1Year
N1-S57S-F-Lic	N1-CloudCampus,Foundation,S57XX-S Series,Per Device
N1-S57S-F-SnS1Y	N1-CloudCampus,Foundation,S57XX-S Series,SnS,Per Device,1Year
N1-S57S-A-Lic	N1-CloudCampus,Advanced,S57XX-S Series,Per Device
N1-S57S-A-SnS1Y	N1-CloudCampus,Advanced,S57XX-S Series,SnS,Per Device,1Year
N1-S57S-FToA-Lic	N1-Upgrade-Foundation to Advanced,S57XX-S,Per Device
N1-S57S-FToA-SnS1Y	N1-Upgrade-Foundation to Advanced,S57XX-S,SnS,Per Device,1Year

More Information


For more information about Huawei Campus Switches, visit <http://e.huawei.com> or contact us in the following ways:

- Global service hotline: <http://e.huawei.com/en/service-hotline>
- Logging in to the Huawei Enterprise technical support website: <http://support.huawei.com/enterprise/>
- Sending an email to the customer service mailbox: support_e@huawei.com

Copyright © Huawei Technologies Co., Ltd. 2021. All rights reserved.

No part of this document may be reproduced or transmitted in any form or by any means without prior written consent of Huawei Technologies Co., Ltd.

Trademarks and Permissions

 HUAWEI and other Huawei trademarks are trademarks of Huawei Technologies Co., Ltd.

All other trademarks and trade names mentioned in this document are the property of their respective holders.

Notice

The purchased products, services and features are stipulated by the contract made between Huawei and the customer. All or part of the products, services and features described in this document may not be within the purchase scope or the usage scope. Unless otherwise specified in the contract, all statements, information, and recommendations in this document are provided "AS IS" without warranties, guarantees or representations of any kind, either express or implied.

The information in this document is subject to change without notice. Every effort has been made in the preparation of this document to ensure accuracy of the contents, but all statements, information, and recommendations in this document do not constitute a warranty of any kind, express or implied.

Huawei Technologies Co., Ltd.

Address: Huawei Industrial Base Bantian,
Longgang Shenzhen 518129 People's
Republic of China

Website: www.huawei.com